

MSX205M Series

Specification Sheet

These versatile sectioning machines offer both linear and radial feed configurations in efficient benchtop models.

2.04 HP (1.5 kW)
AC motor with
electronic brake



Convenient easy-to-operate
control panel


Variable
speed

Spindle design supports up
to 8 in. (200 mm) blade
with 1 in. (25.4 mm) arbor



Radial arm with manual
locking feature for table
sectioning

Integrated 4.2-gallon (16 liter)
recirculating system

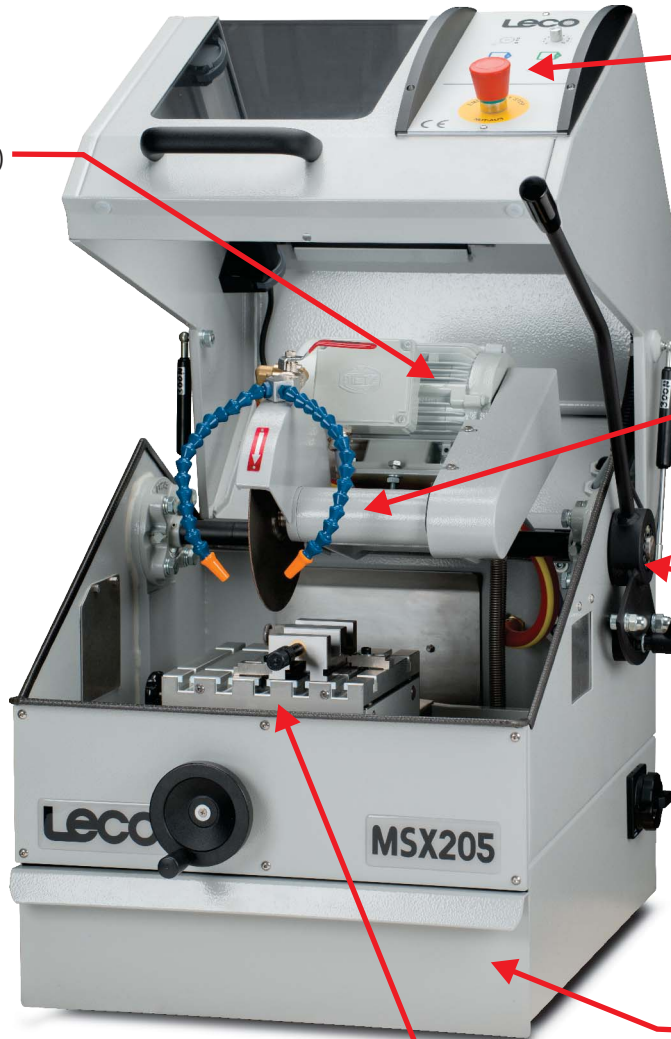

MSX205M2

8.26 in. (210 mm) x
8.26 in. (210 mm)
T-slotted table for flexible
sample fixturing

Manually adjustable Y-table
for sample position and
parallel sections
(M2 model only)



LECO[®]
Delivering the Right Results